

TEST CERTIFICATE



SHEFFIELD
TESTING LABORATORIES LTD

56 Nursery Street, Sheffield, S3 8QP, U.K.
Telephone: 01140 272 6521 Fax: 01140 272 3248
e-mail: sls@conest.demon.co.uk

OUR REF JMSAM

ORDER NO. DHL 2209



Results of test's applied to Five Putlog Coupler

Each Putlog Coupler was connected to Scaffolding Tubes at right angles and a Torque of 40 Ft/lb was applied. None of the couplers showed any visible signs of deformation.

Each Coupler when tested in Accordance with BS 1139 Section 2.2. Paragraph II, withstood a Load of 1.2 kN without slipping.

Certified B.R. Ancliff
Authorised Signatory
B.R. Ancliff

TEST CERTIFICATE




SHEFFIELD

55 Nursery Street, Sheffield, S1 2DF, U.K.
Telephone: (0114) 272 8581 Fax: (0114) 272 3298

OUR REF:- LM/SAP

ORDER NO:- DHL 2235

CLIENT:

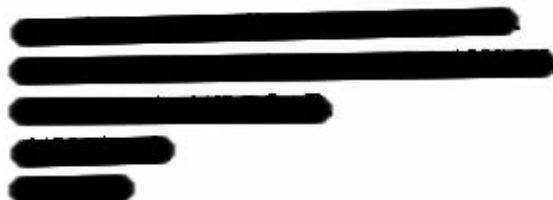

Results of Tensile Tests on Six Friction Type Sleeve Couplers.

Coupler No.	Maximum Load (kN)
1	18.0*
2	18.0*
3	18.0*
4	16.46
5	18.0*
6	17.06

* Test stopped

Tested in accordance with :- BS 1139 Section 2.1 - 9.6

Certified *B.R. Ancliff*
 Authorised Signatory
 B.R. Ancliff